

Explosion Proof Diaphragm Switch

D1X, D2X Series

Features

- ▶ Hermetically sealed
- ▶ Explosion proof housing for hazardous location
- ▶ Tamper proof setpoint adjustment
- ▶ Ideal for pressure or vacuum
- ▶ UL, CSA, ATEX approved
- ▶ NEMA 4, 7, 9 & IP66

Applications

- ▶ Pump & compressor monitoring
- ▶ Hydraulic power units
- ▶ Oil & gas
- ▶ Food & beverage
- ▶ Utility & power generation
- ▶ Mining

General Specifications*

Accuracy:	± 0.5% of the adjustable range
Switch:	
Type:	Single pole double throw (SPDT) Snap Action; single circuit
Rating:	10 amps @ 125/250 VAC; 3 amps @ 480 VAC (Class A or H limit switch). Consult sales drawing for ratings of optional limit switches.
Wetted Parts:	
Process Fitting:	303 stainless steel
Diaphragm:	17-7 PH stainless steel
Enclosure:	Die-cast aluminum, anodized and painted
Electrical Connection:	Screw terminals on covered terminal strip via 1/2" NPT (D1X) and 3/4" NPT (D2X) conduit connection.
Enclosure Ratings:	NEMA 4, 7, 9
Pressure Connection:	1/4" NPT Female
Approvals:	
UL (standard):	All models are UL approved for use in hazardous locations Class I, Groups B, C, & D; Class II, Groups E, F, & G. UL File No. E37043

* See product configurator for additional options.


Wiring Code

Lead	Circuit #1		Circuit #2	
	Pressure	Vacuum	Pressure	Vacuum
Normally Closed	Blue	Red	Orange	Yellow
Common	Purple	Purple	Brown	Brown
Normally Open	Red	Blue	Yellow	Orange



Approvals (cont.):	
CSA (standard):	All models are CSA approved for use in hazardous locations Class I, Groups B, C & D; Class II, Groups E, F, & G. CSA File No. LR22354
ATEX (optional):	EX models are ATEX marked as follows: CE 0081, ISSEp 08 ATEX024X II 2G D, Ex d IIC T6 Ex tD A21 IP66 T80°C -40°C ≤ Tamb ≤ +75°C
Temperature Range:	
Operating:	-40° to +165°F (-40° to +74°C)
Storage:	-65° to +200°F (-54° to 93°C)
Adjustment Instructions:	
Pressure:	Turn adjustment screw counterclockwise to raise actuation point.
Vacuum:	Turn adjustment screw clockwise to increase setpoint (higher vacuum).
Options:	Factory pre-set
Shipping Weight:	Single - approximate 5.0 lbs. Double - approximate 5.5


Wiring Diagram

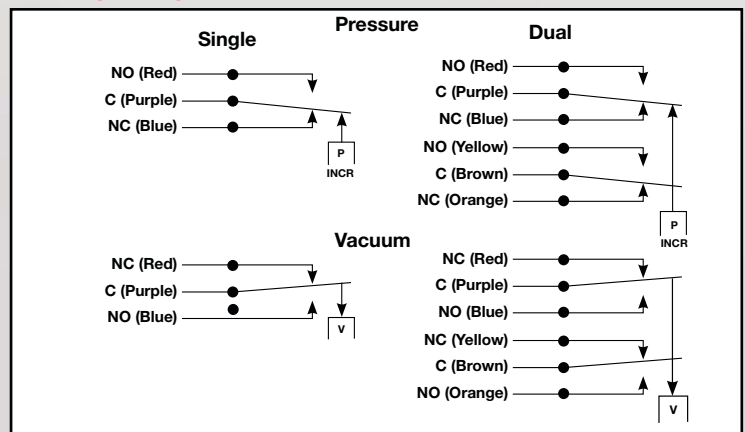

Explosion Proof Diaphragm Switch

D1X, D2X Series

Technical Drawing

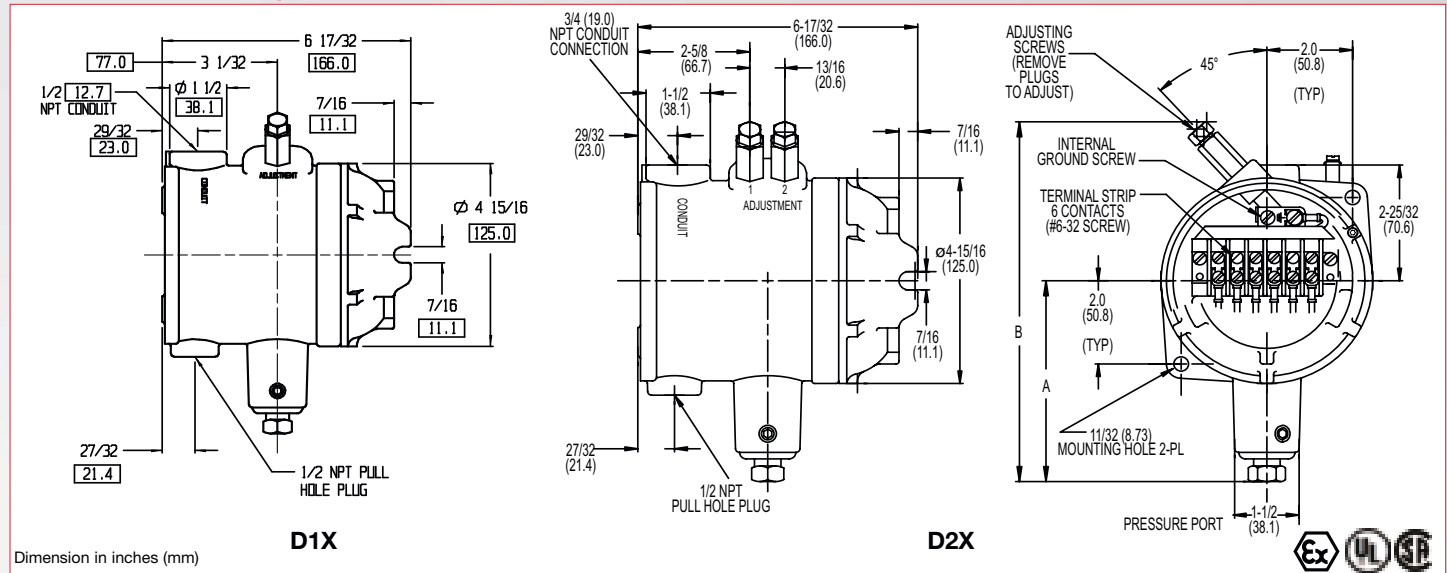

Product Configurator

Example	D1X	-A	3SS	-P2	-UL
H	Hermetically sealed limit switch option - Class I, Division II (requires AA, CC or HH limit switch)				
Base Configuration					
D1X	Single setpoint housed version				
D2X	Dual setpoint housed version				
Limit Switch¹					
-A	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; (standard for pressure range 3SS, 80SS or 150SS)				
-H	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; (standard for pressure range 18SS)				
-J	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; (comes with an elastomer boot)				
-M	10 amps @ 125/250 VAC; 3 amps @ 480 VAC; 0.5 amps @ 125 VDC; 0.25 amps @ 250 VDC				
-GH	1 amp @ 125 VAC; 1 amp @ 24 VDC with Gold Contacts				
-AA	Hermetically sealed; 4 amps @ 125/250 VAC (not available on vacuum models)				
-CC	Hermetically sealed; 10 amps @ 125/250 VAC (not available on vacuum models)				
-HH	Hermetically sealed; 5 amps @ 125/250 VAC (not available on vacuum models)				
Options					
-UL	UL & CSA Approval				
-EX	ATEX Certified, -EX in place of UL for ATEX only				
-Sxxx	Factory pre-set (consult factory)				
Pressure Connection					
Blank	1/4" NPT female pressure connection (standard)				
-P2	1/2" NPT female pressure connection				
Adjustable Pressure Range					

Adjustable Pressure Range

	Adjustable Range (PRESSURE)				Approx. Deadband ² (Actuation Value) psi-(bar)	Proof Pressure psi (bar)
	Decreasing - psi (bar)		Increasing - psi (bar)			
	Min	Max	Min	Max		
3SS	.03 (.00)	2.85 (.2)	.18 (.01)	3 (.2)	.07 - .15 (0 - .01)	10 (.7)
18SS	.4 (.03)	17.74 (1.2)	.66 (.04)	18 (1.2)	.12 - .26 (.01 - .02)	60 (4.1)
80SS	.5 (.03)	76.6 (5.2)	3.9 (.3)	80 (5.4)	1.6 - 3.4 (.1 - .2)	160 (10.9)
150SS	1.5 (.10)	144 (9.8)	7.5 (.5)	150 (10.2)	2.3 - 6.0 (.2 - .4)	300 (20.4)

	Adjustable Range (VACUUM)				Approx. Deadband ² (Actuation Value) In. Hg	Proof Pressure In. Hg
	Decreasing - In. Hg		Increasing - In. Hg			
	Min	Max	Min	Max		
3SS	0.06	5.72	0.34	6	.14 - .28	6
18SS	0.8	29.2	1.6	30	.4 - .8	30

NOTES:

¹ Consult Supplemental Guide for specific deadband values

² Deadband values indicated when used with the "standard" limit switch

3211 Fruitland Avenue • Los Angeles, CA 90058 • ☎ 800-835-1060 • Fax: 323-589-3463 • www.barksdale.com CONTROL PRODUCTS

See Barksdale's Standard Conditions of Sale • Specifications are subject to modification at any time • Bulletin #S0082-K • 01/16 • ©2016 • Printed in the U.S.A.

Barksdale®